








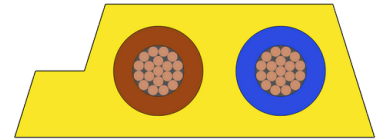


# BUS AS-INTERFACE MOBILE




## General Construction

-  **Conductor:** Flexible (nned copper (Class 5))
-  **Insulation:** Wall thickness: 0,5 mm
-  **Color Cores:** Colours acc. to VDE 0293 (HD308)

## Technical data

-  **Test Voltage:** 2 kV
-  **Temperature:** fixed: -40 °C to +85 °C / flex: -30 °C to +85 °C
-  **Flame Resistance:** VDE 0482-332-1-2 / IEC 60332-1-2
-  **Oil Resistance:** Yes

## Movement Data @20°C

-  **Bending radius:** fixed: 3 x D / flex: 6 x D

Name	Cable type	Ø mm	Weight Kg/Km
ASIPUR2X1,5YE	2 x 1,5	10 x 4	57,0
ASIPUR2X1,5BK	2 x 1,5	10,1 x 4	57,0
ASIRUB2X1,5YE	2 x 1,5	10 x 4	57,0
ASIRUB2X1,5BK	2 x 1,5	10 x 4	57,0
ASIRUB2X2,5YE	2 x 2,5	9,7 x 4	84,0

\*All trademarks used herein are the property of their respective owners. Reference to any non-Movinflex trademarks is not intended to claim any endorsement or association between Movinflex and the respective trademark owners, and should not be construed.

Customer responsibility to verify suitability of the product for the intended purpose remains. Processing and application of the goods are outside of our control possibilities. Right to technical changes is reserved.

