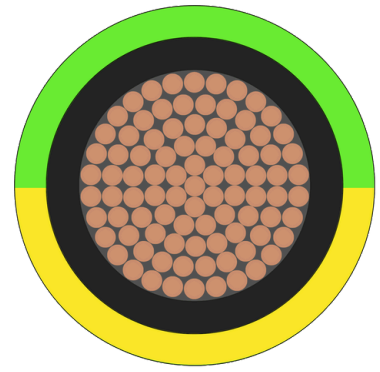
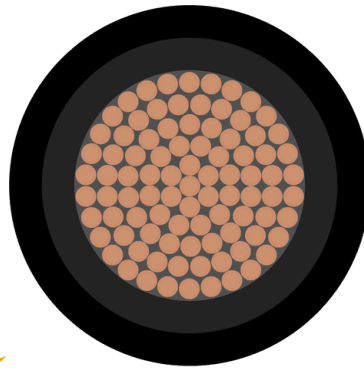








CONTROL SINGLEWIRE UR





AWM Style 11846 (90°C / 1000V)




General Construction

	Conductor:	Bare copper (Class 5) Acc. to IEC 60228 / VDE 0295 / UL 1581
	Tape	Non woven tape overlapped
	Insulation:	PP compound; colour black RAL 9005 Acc. to UL 90 °C – 1000 V
	Tape	Talc
	Sheath:	Outer sheath: PVC compound acc. to UL 90 °C – 1000 V Style 11846
		Colour: black RAL 9005 or Green/Yellow

Technical data

	Operating Voltage:	1000 V
	Test voltage:	4000 V
	Temperature:	-40 °C to +90 °C (fixed) -5 °C to +90 °C
	Flame Resistance:	IEC 60332-1-2 / IEC 60332-3-24 / UL 1581 VW-1 / CSA FT1
	Conductor Resistance	max at 20 °C acc. to IEC 60228 / VDE 0812
	Insulation Resistance	at 20 °C > 1 GΩ Km

Movement Data @20°C

	Bending radius:	10 x Ø (fixed) / 20 x Ø (flex)
---	------------------------	--------------------------------

Approval

Oil-resistant: VDE 0473-811-404 / UL 1581 / IEC 60811-404

UV-resistant: yes

Acc. to UL 1581 / UL 758 / CSA 22.2

Name	Cable type	Ø mm	Weight Kg/Km
FIXIX6UR	1 x 6	7,8	118,0
FIXIG6UR	1 x 6	7,8	118,0
FIXIX10UR	1 x 10	9,0	180,0
FIXIG10UR	1 x 10	9,0	180,0
FIXIX16UR	1 x 16	10,0	250,0
FIXIG16UR	1 x 16	10,0	250,0
FIXIX25UR	1 x 25	11,4	370,0
FIXIG25UR	1 x 25	11,4	370,0
FIXIX35UR	1 x 35	13,0	490,0
FIXIG35UR	1 x 35	13,0	490,0
FIXIX50UR	1 x 50	15,6	665,0
FIXIG50UR	1 x 50	15,6	665,0
FIXIX70UR	1 x 70	17,9	910,0
FIXIG70UR	1 x 70	17,9	910,0
FIXIX95UR	1 x 95	19,5	1.195,0
FIXIG95UR	1 x 95	19,5	1.195,0
FIXIX120UR	1 x 120	22,3	1.545,0
FIXIG120UR	1 x 120	22,3	1.545,0
FIXIX150UR	1 x 150	25,0	1.750,0
FIXIG150UR	1 x 150	25,0	1.750,0
FIXIX185UR	1 x 185	28,6	2.320,0
FIXIG185UR	1 x 185	28,6	2.320,0
FIXIX240UR	1 x 240	31,7	2.960,0
FIXIG240UR	1 x 240	31,7	2.960,0

*All trademarks used herein are the property of their respective owners. Reference to any non-Movinflex trademarks is not intended to claim any endorsement or association between Movinflex and the respective trademark owners, and should not be construed.

Customer responsibility to verify suitability of the product for the intended purpose remains. Processing and application of the goods are outside of our control possibilities. Right to technical changes is reserved.

