









HIGH TEMPERATURE SIAF MT POL 6,6KV

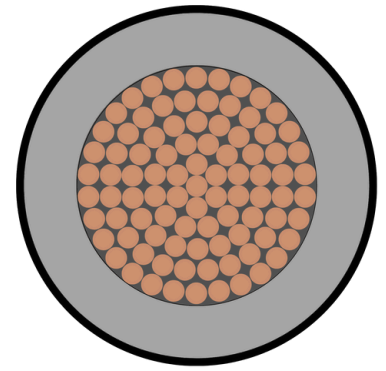

General Construction

 Conductor:	Flexible tinned copper (Class 5) Acc. to CEI EN 60228
Protective Tape:	Semiconductive tape
Insulation:	Silicone rubber Acc. to EN 50363
Covering:	Polyester braid

Technical data

 Nominal voltage:	6,6 kV
 Operating temperature range:	-60°C to +180°C (Fixed)
 Max short circuit temperature:	350 °C
 Flame:	IEC 60332-1-2; EN 61034-1/2; EN 60754-1/2; EN 60332-1-2

Movement Data @20°C

 Bending radius:	4 x Ø (Fixed)
--	---------------

Approval

Oil-resistant: yes

Halogen-free: yes

Name	Cable Type	Ø mm	Weight Kg/Km
SIAFPOL1X16/6,6KV	1 x 16	3,0	11,6
SIAFPOL1X25/6,6KV	1 x 25	3,2	13,6
SIAFPOL1X35/6,6KV	1 x 35	3,2	14,8
SIAFPOL1X50/6,6KV	1 x 50	3,2	16,1
SIAFPOL1X70/6,6KV	1 x 70	3,2	17,8
SIAFPOL1X95/6,6KV	1 x 95	3,4	19,7
SIAFPOL1X120/6,6KV	1 x 120	3,4	21,5
SIAFPOL1X150/6,6KV	1 x 150	3,4	23,0
SIAFPOL1X185/6,6KV	1 x 185	3,4	24,7

