








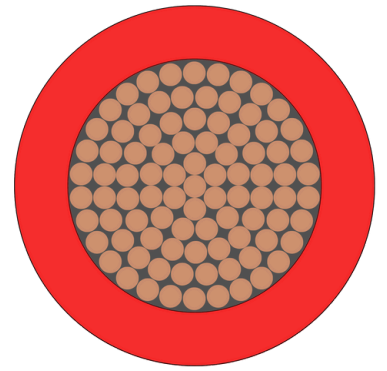

HIGH TEMPERATURE SIAF



General Construction

 Conductor:	Flexible tinned copper (Class 5) Acc. to CEI EN 60228
Insulation:	High tear resistant silicone rubber EWKF Acc. to EN 50363; CEI 20-19 Colour: red

Technical data

 Nominal voltage:	(≥ 1 mm): 300/500 V (<1mm): 450/750 V
 Operating temperature range:	-60°C to +180°C (Fixed)
 Max short circuit temperature:	350 °C
 Flame:	IEC 60332-1-2; EN 61034-1/2; EN 60754-1/2;
	EN 60332-1-2

Movement Data @20°C

 Bending radius:	4 x \emptyset (Fixed)
--	-------------------------

Approval

Oil-resistant: yes

Halogen-free: DIN EN 50267 / IEC 60754

Name	Cable Type	Ø mm	Weight Kg/Km
SIAF1X0,22	1 x 0,22	1,7	6,0
SIAF1X0,25	1 x 0,25	1,8	7,0
SIAF1X0,35	1 x 0,35	1,9	8,0
SIAF1X0,50	1 x 0,5	2,1	10,0
SIAF1X0,75	1 x 0,75	2,3	13,0
SIAF1X1	1 x 1	2,5	15,0
SIAF1X1,5	1 x 1,5	2,8	21,0
SIAF1X2,5	1 x 2,5	3,5	34,0
SIAF1X4	1 x 4	4,1	49,0
SIAF1X6	1 x 4	4,7	68,0
SIAF1X10	1 x 10	6,1	110,0
SIAF1X16	1 x 16	7,5	168,0
SIAF1X25	1 x 25	9,1	254,0
SIAF1X35	1 x 35	10,3	347,0
SIAF1X50	1 x 50	12,0	490,0
SIAF1X70	1 x 70	13,7	686,0
SIAF1X95	1 x 95	15,6	888,0
SIAF1X120	1 x 120	17,4	1.149,0
SIAF1X150	1 x 150	19,3	1.411,0
SIAF1X185	1 x 185	21,4	1.722,0
SIAF1X240	1 x 240	24,3	2.284,0
SIAF1X300	1 x 300	26,9	2.895,0

