




SERVO KEBA

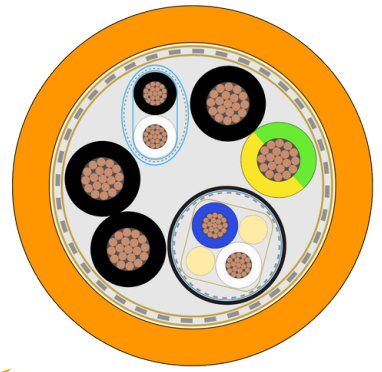

KEBADSL20PUR

AWM Style 21223 (80°C / 1000V)



General Construction



Conductor:

4xAWG21

stranded bare copper wire 0,15mm; nom.

0,5mm² - AWG21; nominal diameter 0,95mm. Lay agree with UL 758 tab 5,9; conform to EN 13602 - ETP1, DIN 40500 E-Cu 58

1x2xAWG26

stranded bare copper wire 0,10mm; nom. 0,15mm² - AWG26; nominal diameter 0,50mm. Lay agree with UL 758 tab 5,9; conform to EN 13602 - ETP1, DIN 40500 E-Cu 58

1x2xAWG22

stranded bare copper wire 0,15mm; nom. 0,34mm² - AWG22; nominal diameter 0,75mm. Lay agree with UL 758 tab 5,9; conform to EN 13602 - ETP1, DIN 40500 E-Cu 58



Insulation:

4xAWG21 polyolefin compound; nominal diameter 1,7mm

1x2xAWG26 foam polyolefin compound; nominal diameter 1,3mm

1x2xAWG22 polyolefin compound; nominal diameter 1,45mm



Color case:

4xAWG21 black printed (U/L1/C/L+) - (V/L2) - (W/L3/D/L-) + green/yellow

1x2xAWG26 white – blue




1x2xAWG22 white – black

Assembly:






1x2xAWG26 two cores twisted with solid filler in gap

1x2xAWG22 two cores twisted to a pair


4x21AWG + 1x(2x26AWG) + 1x(2x22AWG) stranded together around a central fibrous filler; if necessary other fillers could be used for a better roundness.

-  **Shield:** **1x2xAWG26** braid type; Rn copper wire; nominal opRcal coverage 85% + bi-aluminized; nonwovens tape over braid screen
1x2xAWG22 braid type; Rn copper wire; nominal opRcal coverage 85%
Braid type; Rn copper wire; nominal opRcal coverage 85%
-  **Protective Tape:** **1x2xAWG26** tape over assembly + tape over tape screen
1x2xAWG22 tape under and over screen
Tape under and over total screen
-  **Sheath:** **1x2xAWG26** polyolefin compound; nominal diameter 4,0mm; colour black
Outer sheath: PUR (ether base), 90 ShA; diameter 10,0 ±0,30mm
Colour: orange similar RAL 2003; conform to UL AWM Style 21223

Technical data

-  **Nominal Voltage:** 1000Vrms
-  **Test Voltage:** 2000 Vac (C/C) (AWG21)
1000 C/C (AWG22)
500 C/C (AWG26)
-  **Temperature:** -40°C to +80°C (Fixed) - 25°C to +80°C (Flexible)
- Electric Resistance:** (AWG21): 39,9 Ω/Km (IEC 60344)
(AWG22): 62,4 Ω/Km (IEC 60344)
(AWG26): 145,80 Ω/Km (IEC 60344)
-  **Oil Resistance:** According to UL758
-  **Flame Resistance:** UL Cable Flame Test; UL VW-1, CSA FT1; IEC 60332-1-2
- Capacity (AWG26):** 45 ±15 pF/m (800-1000Hz)
- Impedance (AWG26):** 110 ±11 Ω

Movement Data

- Bending:** up to 5 Mio
-  **Bending radius:** 5 x D (Fixed) - 7,5 x D (Flexible)

Approval



Halogen-free: CEI EN 60754-1 / VDE 0482-754-1



UV-resistant UL 1581 - Silicone, Pb, FCKW free

Name	Cable type	Ø mm	Tolerance
KEBADSL20PUR	4 x 0,5 + 1 x (2 x 0,34) + 1 x (2 x 0,15)	10,0	±0,30 mm

*All trademarks used herein are the property of their respective owners. Reference to any non-Movinflex trademarks is not intended to claim any endorsement or association between Movinflex and the respective trademark owners, and should not be construed.

Customer responsibility to verify suitability of the product for the intended purpose remains. Processing and application of the goods are outside of our control possibilities. Right to technical changes is reserved.

