








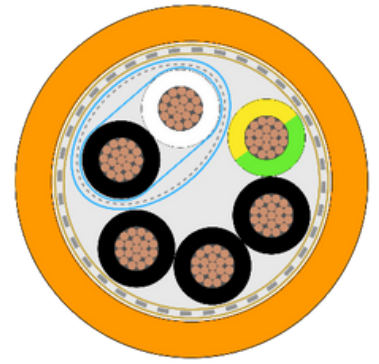

SERVO MOBILE SIEMENS MC800+








According to SIEMENS® 6FX-8008PLUS
AWM Style 21209 (90°C / 1000V)








General Construction

-  **Conductor:** Flexible bare copper conductor Cl.6 according to IEC60228/VDE0295
-  **Insulation:** PP compound
-  **Color Cores:** Black printed (U / L1 / C / L+) (V / L2) (W / L3 / D / L-) Yellow/Green.
Pair: White - Black
-  **Shield:** Tinned copper braid; Nominal optical coverage 85%
-  **Protective Tape:** Pair - PET tape under and over shield.
Total - Nonwovens tape under and over shield
-  **Outer Jacket:** Pur (ether base), 90 ShA Compound accordance to UL758
Color Jacket: Orange similar RAL2003




Technical data

-  **Nominal Voltage:** 1000Vrms
-  **Test Voltage:** 4000V
-  **Temperature:** -40°C to +80°C (Fixed) - 25°C to +80°C (Flexible)
-  **Flame Resistance:** UL Cable flame test CSA FT1 - IEC60332-1-2
-  **Oil Resistance:** According to UL758

Movement Data @20°C

-  **Bending cycles:** up to 10Mio (20 Mio Stroke)
-  **Bending radius:** 7,5 x D (Flexible) - 5 x D (Fixed)
-  **Speed:** up to 300 m/min
-  **Acceleration:** up to 60 m/sec²
-  **Torsion:** +-180°/1m

Approval

-  Halogen free according to CEI EN 60754-1 / VDE 0482-754-1 - UV Resistance
-  Silicone, Pb, Cd, Hg, FCKW free
-  RoHS compliant 2014/35/UE; 2014/30/UE; 2011/65/CE; 2015/863/UE

Name	Reference	Cable Type	Ø mm	Tolerance	Weight
MOV4G15CPUR-V	6FX8008 – 1BB11	4 x 1,5	9,1	±0,40 mm	128,0
MOV-4G25CPUR-V	6FX8008 – 1BB21	4 x 2,5	10,6	±0,40 mm	183,0
MOV-4G40CPEXF-V	6FX8008 – 1BB31	4 x 4	12,2	±0,40 mm	270,0
MOV-4G60CPUR-V	6FX8008 – 1BB41	4x 6	14,5	±0,50 mm	385,0
MOV-4G100CPUR-V	6FX8008 – 1BB51	4 x 10	17,9	±0,70 mm	607,0
MOV-4G160CPUR-V	6FX8008 – 1BB61	4 x 16	21,6	±0,70 mm	928,0
MOV-4G250CPUR-V	6FX8008 – 1BB25	4 x 25	25,4	±1,00 mm	1.331,0
MOV-4G350CPUR-V	6FX8008 – 1BB35	4 x 35	29,4	±1,00 mm	1.732,0
MOV-4G500CPUR-V	6FX8008 – 1BB50	4 x 50	33,1	±1,00 mm	2.428,0
MOV-4G15/2CPUR-V	6FX8008 – 1BA11	4 x 1,5 + 2 x 1,5	11,6	±0,40 mm	204,0
MOV-4G25/2CPUR-V	6FX8008 – 1BA21	4 x 2,5 + 2 x 1,5	13,4	±0,40 mm	285,0
MOV-4G40/2CPUR	6FX8008 – 1BA31	4 x 4 + 2 x 1,5	14,8	±0,40 mm	370,0
MOV-4G60/2CPUR-V	6FX8008 – 1BA41	4 x 6 + 2 x 1,5	16,8	±0,50 mm	500,0
MOV-4G100/2CPUR-V	6FX8008 – 1BA51	4 x 10 + 2 x 1,5	19,7	±0,70 mm	691,0
MOV-4G160/2CPUR	6FX8008 – 1BA61	4 x 16 + 2 x 1,5	23,1	±0,70 mm	1.002,0
MOV-4G250/2CPUR-V	6FX8008 – 1BA25	4 x 25 + 2 x 1,5	27,0	±1,00 mm	1.400,0
MOV-4G350/2CPUR-V	6FX8008 – 1BA35	4 x 35 + 2 x 1,5	30,2	±1,00 mm	1.905,0
MOV-4G500/2CPUR-V	6FX8008 – 1BA50	4 x 50 + 2 x 1,5	33,5	±1,00 mm	2.525,0

*All trademarks used herein are the property of their respective owners. Reference to any non-Movinflex trademarks is not intended to claim any endorsement or association between Movinflex and the respective trademark owners, and should not be construed.

Customer responsibility to verify suitability of the product for the intended purpose remains. Processing and application of the goods are outside of our control possibilities. Right to technical changes is reserved.

